





Description and operation

Additional Telephone for a second communication point in a 2 wires audio kit installation. The call arrives at both sets. When the main telephone is picked up, communication is established with the outdoor unit. However, when the Additional telephone is picked up, it has priority and it establishes communication with the outdoor unit, whether the kit telephone is picked up or not. The door can be opened (latch button $\bigcirc \text{---}$) and the volume of the chimes adjusted from either of the telephones.

Mounting

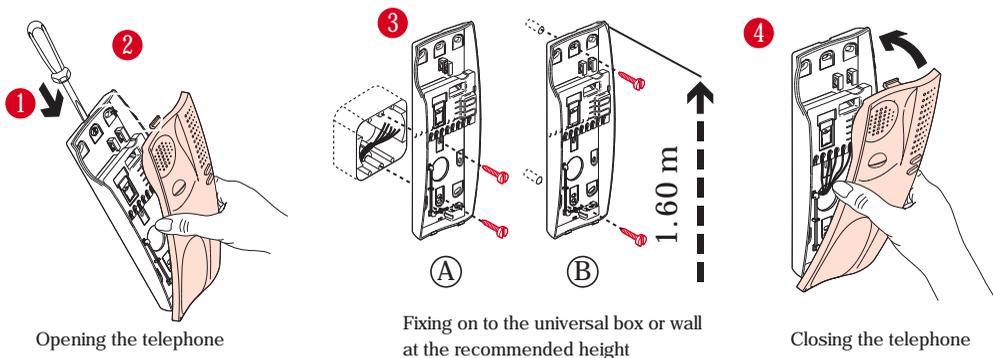

Single wire diagram






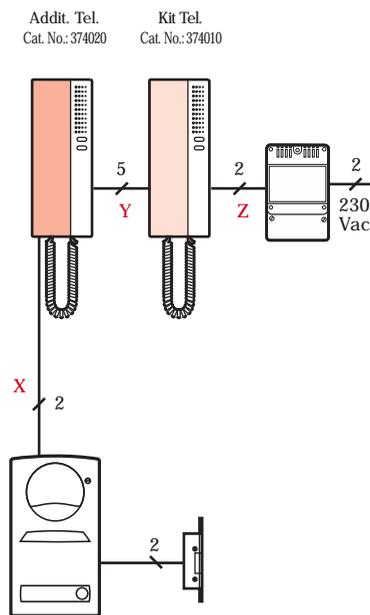


Recommended cross-sections

Connections	Addit. T.	Kit T.	Number of wires	Minimum cross-sections (mm ²)		
				25 m	50 m	100 m
4, 5	↑ Y ↑		2	-	0.25	0.5
3, 9V, 10M	↑ Y ↑		3	-	0.5	1
9, 10		↑ Z ↑	2	0.5	1	2.5
X+Y+Z						
Connections	Addit. T.	Kit T.	Number of wires	Minimum cross-sections (mm ²)		
				X+Y+Z 50 m	X+Y+Z 100 m	
V, M	↑ X ↑		2	0.5	1	

Installation diagram

Volume of chimes
The volume of the telephone chimes can be adjusted using the bridges at the top of the terminal cover.

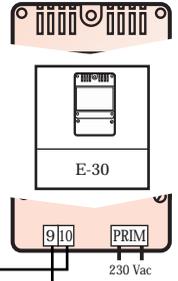

Important:
Wires from the outdoor unit to an additional telephone

Important:
Wires from power supply to kit telephone

Wires wrongly polarised.
Continuous call.

